


Heavy-duty TrackMotion


## Unique solution for the highest payloads Move the heaviest robots with the TMF-6 floor mounted linear axis

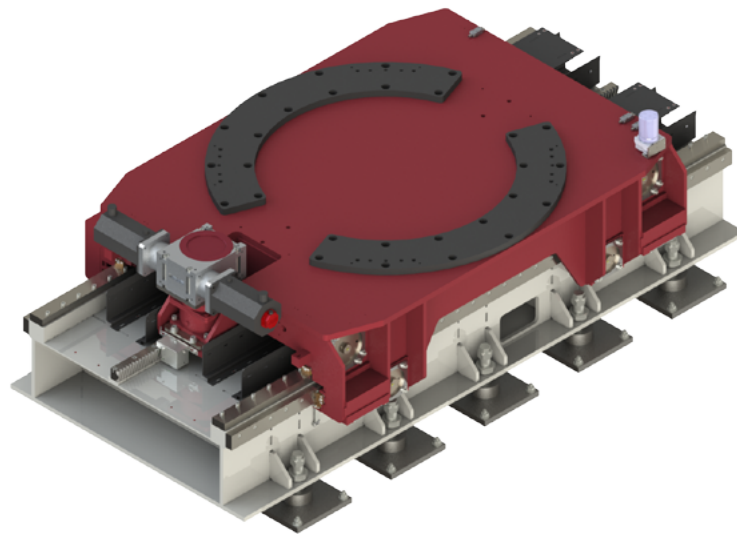


### The TMF-6 floor mounted linear axis

Güdel's TMF (TrackMotionFloor) product range includes models for robots of every size, which ensure that production processes operate smoothly and efficiently. Apart from the TMF in size four (TMF-4) for universal applications, Güdel developed the TMF-5 for loads just over 10 tons. The next size up, the TMF-6, is globally unique. The TMF-6 moves static payloads of 20 tons,


including articulated robot payloads of up to 14.2 tons. The seventh axis enables an efficient extension of the operating area by substituting several robots. The TMF-6 is yet another example of Güdel's innovative spirit. Regardless of the size of the load to be moved Güdel offers the right sized linear axis solution for every robot.

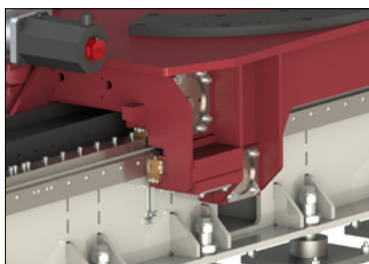

Cartridge mounted heavy-duty rollers in carriage. Eccentric adjustment, dirt resistant, easy replacement.

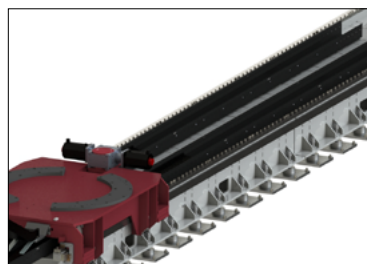

Moves the largest articulated robots with total weight of 14.2 metric tons

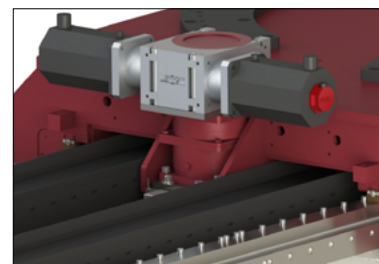


Güdel gearbox combination minimizes interference contours on the carriage plate

## TMF-6 moves heavy industrial robots:

Fanuc M-2000iA / 900L  
 Fanuc M-2000iA / 1200  
 Fanuc M-2000iA / 1700L  
 Fanuc M-2000iA / 2300

Industrial robots from other manufacturers on request.

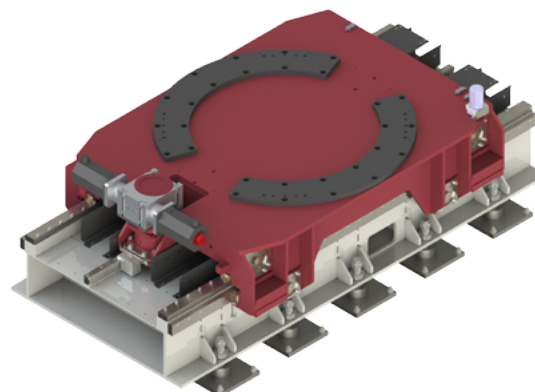

## Impressive features of the Güdel TMF-6:

- Moving payloads of up to 20 tons
- High dynamics in relation to size and moving load
- Variable adapter plates for easy connection of robots and tool holding devices
- Compact and durable design

<b>Static payload</b>	20,000 kg
<b>Robot weight incl. payload</b>	14,200 kg
<b>Number of carriages</b>	Up to 2 carriages - More on request.
<b>Guideway system</b>	Heavy-duty guideway system with flat rails and double roller support.
<b>Drive system</b>	Rack and pinions with helical gearing, hardened and ground. Combination of Güdel HPG-120 worm gearbox and Güdel NR-240 planetary gearbox. Dual motors provided with robot. Further motor types on request.
<b>Length and stroke</b>	Track length from 4 m to 100 m in 1 m steps. Strokes from 1.33 m to 97.33 m.
<b>Pedestal</b>	max. 500 mm
<b>Floor mounting</b>	Welding plate including anchor rods. Floor thickness min. 250 mm. Pressure absorption of 5 t/m <sup>2</sup> . Concrete quality min. C25 (250 kp/cm <sup>2</sup> )
<b>Noise emission</b>	max. 75 dB(A)

## Güdel company profile

Güdel is a manufacturer of high-precision machine components and provider of sophisticated automation solutions.

Its spectrum of products ranges from linear guideways, racks, pinions and drives right through to linear axes and gantry robots. Güdel assembles its products into systems


with a high degree of control intelligence and complete plant installations, which can be used in the automotive, tire, metal, rail, intra-logistics, pharmaceutical, renewable energy, wood, and aerospace industries. Güdel's technology is characterized by its innovation, quality and modularity.

## TMF-6 Technical data

### Carrier – Energy chain

Carriage Weight	2,460 kg*
Energy chain	2x H4.80.18.300.0
Weight of energy chain	5.7 kg/m
Mounting bracket with tiwrap clamp	E4.800.18.1.12.C
Energy chain cross section (internal dimension):	Height: 80 mm, width: 187 mm
Precision (Repeatability)	+/- 0.05 mm

\* Weight without motors, electrical boxes, cables.

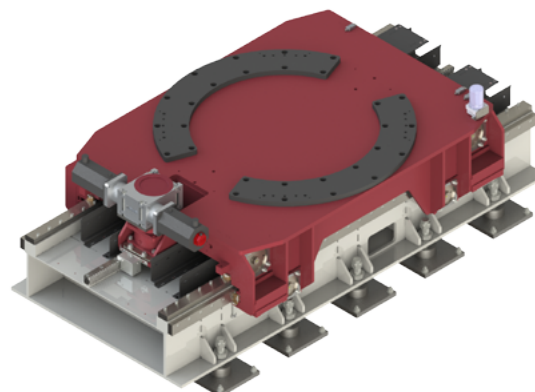


### Drive data

		FANUC		Static load
Robot type		900 L / 1200	1700 L / 2300	-
Static payload	[N]	-	-	200000
Speed	m/min	60	45	45
Acceleration	m/s <sup>2</sup>	1	1	1
Gearbox ratio	[-]	20	25	25
Güdel gearbox type NR/HPG		240/120	240/120	240/120
Linear stroke per motor revolution	[mm]	20	16	16
Acceleration time	[s]	1.54	1.16	1.16
Stroke of axis while accelerating	[m]	0.82	0.46	0.46
Motor speed	min <sup>-1</sup>	3000	2813	2813
Stall torque of motor	[Nm]	12	12	17
Max. torque of motor	[Nm]	45	45	58
Reduced inertia of axis	kgm <sup>2</sup>	6.1E-02	6.1E-02	7.9E-02
Motor type		2x aiF40/3000	2x aiF40/3000	2x aiF40/3000



### Options

No.	Designation	No.	Designation
50	Cam rails and cams	164	Extended energy chain support
51	Mechanical multi-limit switch	172	Pedestal
52	Zero position mark	180	Bronze wiper
60	Automatic lubrication system	300	Documentation, other languages, on paper
81	Coated rollers, guideways, racks, and pinion	310	Special painting at customer request
91	Independent Y-multiple carriages, each with a drive	311	Gaskets for low temperature
160	Vertical dividers, insertable shelves for energy chains	320	ATEX certification
162	Enclosed energy chain		

## Load diagram


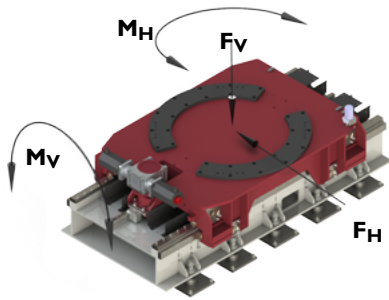


FV max. (kN): Vertical force  
 MV max. (kNm): Vertical moment  
 FH max. (kN): Horizontal force  
 MH max. (kNm): Horizontal moment

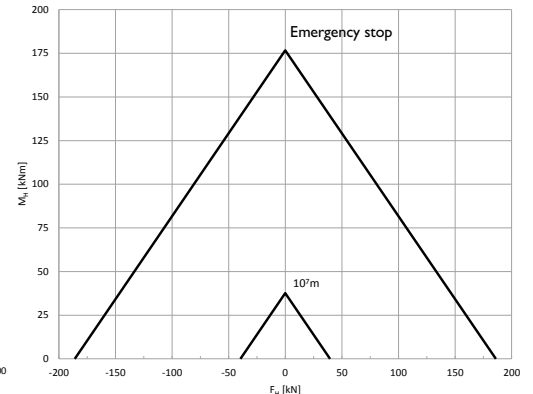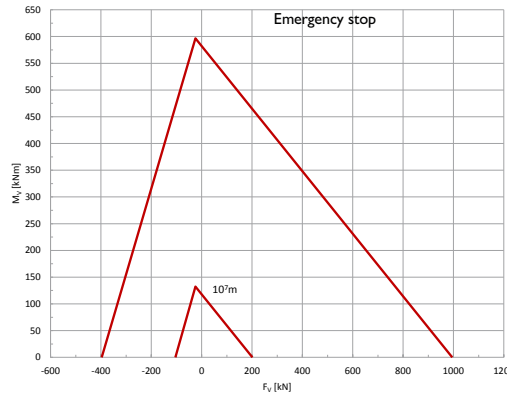

Recommended basic values for dimensioning the linear axis (Mv, Fv, Mh, Fh), emergency stop and service life 10<sup>7</sup> m.

## Dimensions

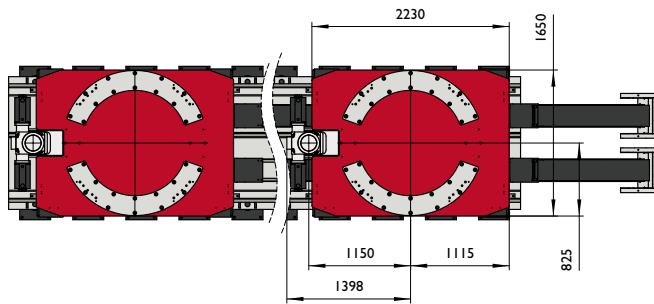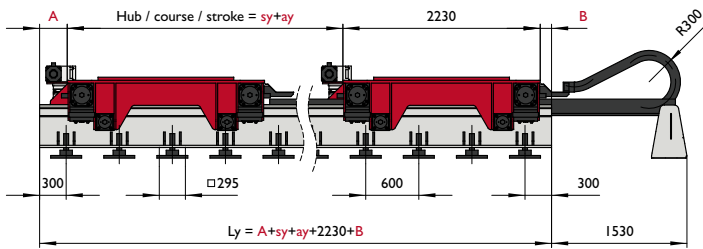


	min.	max.	
Ly	4000	100000	
sy+ay	1330	97330	in 1 m steps
A	312	-	
B	128	-	

Minimum recommended safety stroke ay = 50 mm

## Bending and torsion values

Y-axis

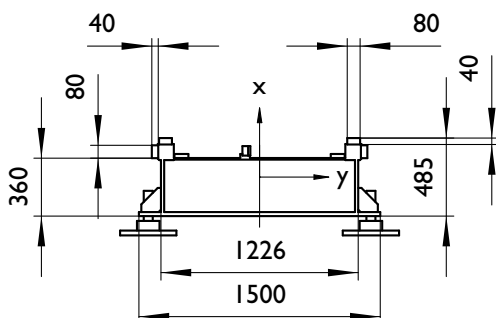

Axis	Mat.	m* (kg/m)	Ix* (cm <sup>4</sup> )	Iy (cm <sup>4</sup> )
Y	S235JR	1025	2407025	323930

\* With rails